

Rotary cultivator for intensive use

405 S*

NEW



Designed for small and medium-size plots, this machine very effectively combines professional level reliability and performance with extreme ease of handling, making it ideal for demanding home users and smallholders. The full range of accessories, including rotors, cutterbars, brushes and snowthrowers, are designed to meet the requirements of users seeking a multifunction machine that's both practical and safe.

* available from spring



Handlebars with vertical and horizontal adjustment and 180° reversible, with vibration-damping device to assure more comfortable handling.



The EHS system ensures ease of use, reduced effort and the maximum simplification for users.



Practical forward/reverse shuttle enables the operator to change quickly into reverse gear from any speed, making the machine easy to handle even with the rotor or other accessories mounted.

Power supply	Engine	Model	Displacement	Power*	Starting	Code
gasoline	POWERED by HONDA	GX 200 OHV	196 cm ³	5.8 HP	recoil start	68359007EN
gasoline	Emak	K 800 H OHV	182 cm ³	5.7 HP	recoil start	68359004EN

* Engine power data refers to the values declared by each manufacturer. These values are calculated in accordance with specific measurement standards (such as SAE J1940, SAE J1349, ISO 1585) and may be modified without prior notice.

Focus on accessories



Rotor Ø 280, 60-50-(40) cm
16 spikes
Fixed coupling
(can be reduced to 40 cm with kit **69210259**)
Code **69219103**



Oil-immersed drive
Code **69229096**



Front shovel L 100x40 cm
Quickfit coupling
With horizontal and vertical adjustment
(requires QuickFit **69212006**)
Code **69209065**




WITH ROTARY CULTIVATOR

Gearbox/ Speed (km/h):

4-speed (2 forward + 2 reverse) with 4.00-8" wheels

Speed (km/h)	1.05	1	1R	1.11
	2.20	2	2R	2.32

Dimensions (mm)

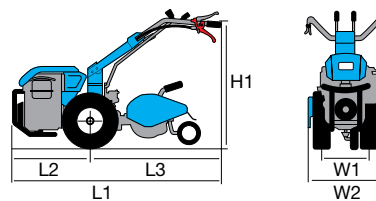

L1	1740
L2	550
L3	1190
H1	1250-300
W1	370
W2	600-400


WITH CUTTERBAR MOWER

Gearbox/ Speed (km/h):

4-speed (2 forward + 2 reverse) with 4.00-8" wheels

Speed (km/h)	1.11	1	1R	1.05
	2.32	2	2R	2.20

Dimensions (mm)

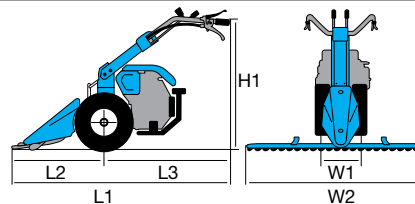

L1	1670
L2	900
L3	770
H1	1250-300
W1	370
W2	1270-950

Transmission	with oil-bath gearbox
Clutch	dry bevel type
Handlebars	with vertical and horizontal adjustment and 180° reversible, with vibration-damping device
Reverse gear	yes, with handlebar lever
Differential	no
Brakes	no
Power take-off	independent 973 rpm
Accessories installation	QuickFit (optional)
Towing hitch	optional
Cowling	no
Weight	90 kg (with engine, rotor and wheels)

Accessories



















405 S

Accessory		Optional accessory			
Rotors					
	Rotor Ø 280, 60-50-(40) cm 16 spikes Fixed coupling (can be reduced to 40 cm with kit 69210259)	69219103		Support wheel	Z0020368
				Rear-mounted furrowing tool	L0009800
	Rotor Ø 280, 60-50-(40) cm 16 spikes Quickfit included (can be reduced to 40 cm with kit 69210259)	69219089		Support wheel	Z0020368
				Rear-mounted furrowing tool	L0009800
Tyred wheels					
	Pair of tyred wheels 4.00x8" Fixed disc Quickfit coupling	69209110		Pair of snow chains	L1055015
	Pair of tyred wheels 4.00x10" Fixed disc (requires spacers 69209112)	69200024A		Pair of snow chains	L0021600
Steel wheels					
	Pair of steel wheels Ø 480x100 mm (requires spacers 69209112)	69209067		Pair of width adjustment rings W 100 mm	L0040100
Towing hitch					
	Towing hitch	69209072			
Adjustable tool holder					
	Adjustable tool holder (requires towing hitch 69209072)	L1055001A		Single share plough	Z0020102
				Furrowing tool	Z0020133
				Potato digger	L0066400
QuickFit					
	QuickFit coupling	69212006			



Accessories

Accessory		Optional accessory		
Drives and Cutter plates				
 <p>Oil-immersed drive</p>	69229096	 <p>0.95 m Complete central cutter plate Semi-fine teeth</p>	69229084	
		 <p>1.15 m Complete central cutter plate Semi-fine teeth</p>	69229085	
		 <p>1.27 m Complete central cutter plate Semi-fine teeth</p>	69229086	
		 <p>0.95 m Complete central cutter plate Special teeth</p>	69229068	
		 <p>1.15 m Complete central cutter plate Special teeth</p>	69229069	
		 <p>1.27 m Complete central cutter plate Special teeth</p>	69229070	
		 <p>1.22 m Complete central cutter plate "UNIVERSAL" ESM (requires kit L0058900)</p>	69229036	
		 <p>1.02 m Complete central cutter plate "KOMUNAL" ESM (requires kit L0058900)</p>	L0066900	
		 <p>1.22 m Complete central cutter plate "KOMUNAL" ESM (requires kit L0058900)</p>	69229037	
		 <p>Ballast for oil-immersed drive</p>	L0105700	
 <p>Directional guides for semi-fine tooth cutter plate</p>	69229064			
Front shovel				
 <p>Front shovel L 100x40 cm Quickfit coupling With horizontal and vertical adjustment (requires QuickFit 69212006)</p>	69209065			
Snow thrower				
 <p>Turbine L 60 cm Two stages Adjustable ejector chute Quickfit coupling (requires QuickFit 69212006)</p>	L0026200			
Front brush				
 <p>Brush L 100xØ 35 cm With horizontal and vertical adjustment Quickfit coupling (requires QuickFit 69212006)</p>	L0094200			
Rotor type flail mower				
 <p>Flail mower L 65 cm 24 'Y' shaped knives Integral safety brake Quickfit coupling (requires QuickFit 69212006)</p>	L0091000			